borg& overström



MAX 20 20

Distinctive by design.

borg& overström

First choice for education and healthcare

Built at an ideal height for both adults and children the B3 also features an ultra-hygienic touch-sensitive control panel, the biggest dispense area in its class for bottles and a tamper-proof rear cover guard for safety.

Reasons to choose

- Ultra-hygienic touch sensitive control panel
- High-capacity dispense area for bottles and jugs
- Integrated cup dispenser
- Sealed, hygienic, direct-chill cooling system






Distinctive by design.



borg& overström

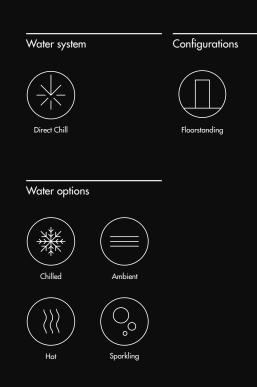

Available colours





Distinctive by design.



borgandoverstrom.com



Borg & Overström Totality®



Driven by a relentless pursuit of excellence, Borg & Overström Totality[®] is a research and development methodology for the advancement of hygiene, innovation and technology in refreshment systems.



Biofilm, limescale and impact resistant epoxy resin panel finish Providing an increased level of hygiene and longevity, Fynil® is a scratch and impact resistant epoxy-resin surface finish - effectively resisting biofilm development and limescale cohesion.



World-class filtration

For the ultimate drinking experience, Borg & Overström appliances can be pre-fitted with a 3M filter to reduce sediment, chlorine, odours and scale.





Laboratory certified 99.999% bacteria-reduced Every Borg & Overström appliance undergoes an anti-microbial, antipathogen, sanitising procedure. The reassurance of hygienically safe appliances is provided by the unique bacteriareducing process, Sterizen®.



Ultra-violet sterilising system For added hygiene confidence, appliances can be fitted with Viovandt™ – an ultra-violet sterilisation process that reduces water-born bacteria.






B3 models	Floorstanding W325xD380xH1065mm	Water system	Dispense height	Max power consumption	Silver	Black
Power requirements Hertz 50/Volts 220-240 Chilled temperature Min 2°C/Max 11°C	Chilled & Ambient	Direct Chill	265mm	100W	104021	104023
	Chilled, Hot & Ambient	Direct Chill	265mm	550W	104031	104033
	Chilled, Ambient & Sparkling	Direct Chill	265mm	140W	104051	104053
Hot temperature	Chilled, Hot & Sparkling	Direct Chill	265mm	640W	104041	104043

Max 92°C

Throughput litres per hour Chilled & Sparkling 30/Hot 6







Additions for B3





Biodegradable paper cups Environmentally-friendly disposable cups designed to fit Borg & Overström cup dispensers perfectly.

Personal drinking bottles 500ml capacity in black or grey frosted soft-touch finish. Comes with quick-release leakproof cap and carry strap.



500ml Swing-top bottles Suitable for dishwashers and bottlewashers. Perfect fit for the B3. Stylish swing-top lid.



Waste kit overflow sensor Six monthly sanitising cycles Featuring an audible highensure appliances function at water level alarm to prevent the the optimum hygiene levels. waste tank from overflowing.



Leak detection kit

Featuring a moisture sensor that shuts the water supply in the unlikely event of a leak. Included as standard on floorstanding models.



Install kit with 3M filter Install appliances simply and effectively in a wide range of applications. Complete with and removal of unwanted a 3M filter. micro-organisms.



Wall bracket kit For added security, use the wall bracket set to anchor your watercooler back to the wall. Simple to fit and unobtrusive.

Sanitisation kit



Rear cover kit Tamper-proof rear cover anchors the appliance to the wall and protects plumbing and electrical connections. Ideal for public areas.

Distinctive by design.



borgandoverstrom.com